




Job Name: \_\_\_\_\_

Date: \_\_\_\_\_ Location: \_\_\_\_\_

Notes: \_\_\_\_\_

## 2308, 120° Recessed Mount LED Strip Fixture

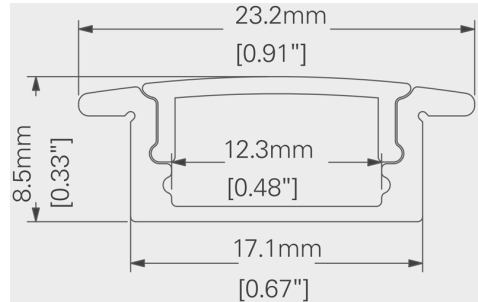

### • Product Description

Prefabricated LED strip fixtures including lens, end caps, mounting hardware and lead wire.


### • Installation Applications

Coves, cabinetry, display cases, stairwells, toe kicks.

### • Product Features

- Anodized aluminum channel allows for heat dissipation and extended LED life.
- Diffused polycarbonate lens.
- Mountable inside any flat surface.
- Continuous diode free illumination .
- Maintenance free.
- Silent operation.
- UV light and IR radiation free.

### Product Specifications

Application Type	Surface mount
Size (LXWXH)	10.5" - 45.8" X 0.91" X 0.33"
Input Voltage	24V DC constant voltage
Power	4W - 16W
CCT	3000K, 3500K, 4000K
Lumens	As page 2
Beam Angle	120 °
CRI	85+
Dimmable	Yes
Lead Wire	7.87"
IP Rating	IP 20 (Indoor)
Rated Life	50,000 hours
Operating Temp.	-30 to 75°C
Mounting	Recessed pressure fit
Electrical Approval	
Warranty	5 Years

## ORDERING OPTIONS

ITEM #	LENGTH	CCT	LUMENS
SF2308-24-12-4-30-SL	10.50"	3000K	300lm
SF2308-24-12-4-35-SL	10.50"	3500K	315lm
SF2308-24-12-4-40-SL	10.50"	4000K	330lm
SF2308-24-24-8-30-SL	22.31"	3000K	600lm
SF2308-24-24-8-35-SL	22.31"	3500K	630lm
SF2308-24-24-8-40-SL	22.31"	4000K	660lm
SF2308-24-36-12-30-SL	34.12"	3000K	900lm
SF2308-24-36-12-35-SL	34.12"	3500K	945lm
SF2308-24-36-12-40-SL	34.12"	4000K	990lm
SF2308-24-48-16-30-SL	45.81"	3000K	1200lm
SF2308-24-48-16-35-SL	45.81"	3500K	1260lm
SF2308-24-48-16-40-SL	45.81"	4000K	1320lm