

ULTRA NARROW LED SMD2835 TAPE LIGHT



PRODUCT CODE

TP2835-5M0620-4W2430	(3000K)
TP2835-5M0620-4W2440	(4000K)

PRODUCT SPECIFICATIONS

• Lighting Applications

Accent and Task lighting

• Installation Applications


Coves, cabinetry, display cases, stairwells, toe kicks

• Product Features


- Narrow minimalist design
- Reliable performance
- Silent operation
- Maintenance free
- Field cuttable and bridgeable
- UV light and IR radiation free
- Dimmable when used with dimmable power supply (sold separate)

Size (LXWXH)	5M X 6mm X 1.6mm
LED Type	SMD2835
Input Voltage	24V DC, constant voltage
Power	10.5W/M, 3.2W/FT
LED per Meter	140
CCT	3000K, 4000K
Lumens	Up to 1320LM/M, 402LM/FT
Beam Angle	120°
CRI	90+
Dimmable	Yes
Installation	3M adhesive backing
Connection	20AWG, 200mm lead both ends
IP Rating	IP20 (Indoor)
Rated Life	50,000 hrs
Operating Temp.	-30~75°C
Electrical Approval	cULus
Warranty	5 years

Dimensions & available lengths

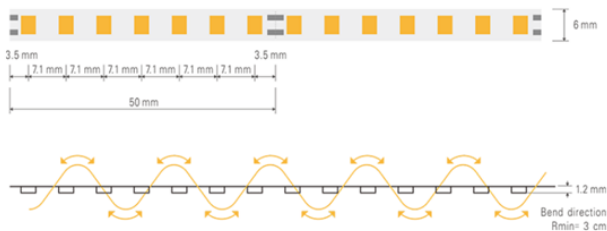

Illuminance Distribution

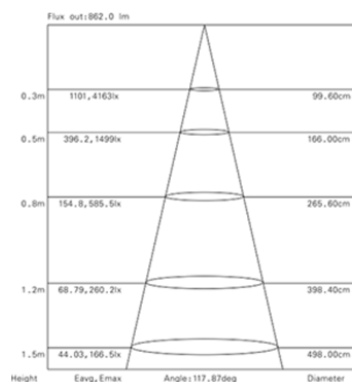

COMPATIBLE DIMMABLE LED POWER SUPPLIES



40W HARDWIRE DRIVER
DVR-HWB-CV-24VDC-40W



96W HARDWIRE DRIVER
DVR-HWB-CV-24VDC-96W



200W HARDWIRE DRIVER
DVR-HWB-CV-24VDC-200W